


ALL STAINLESS SHELL & COIL TYPE HEAT EXCHANGERS
HELD IN STOCK.

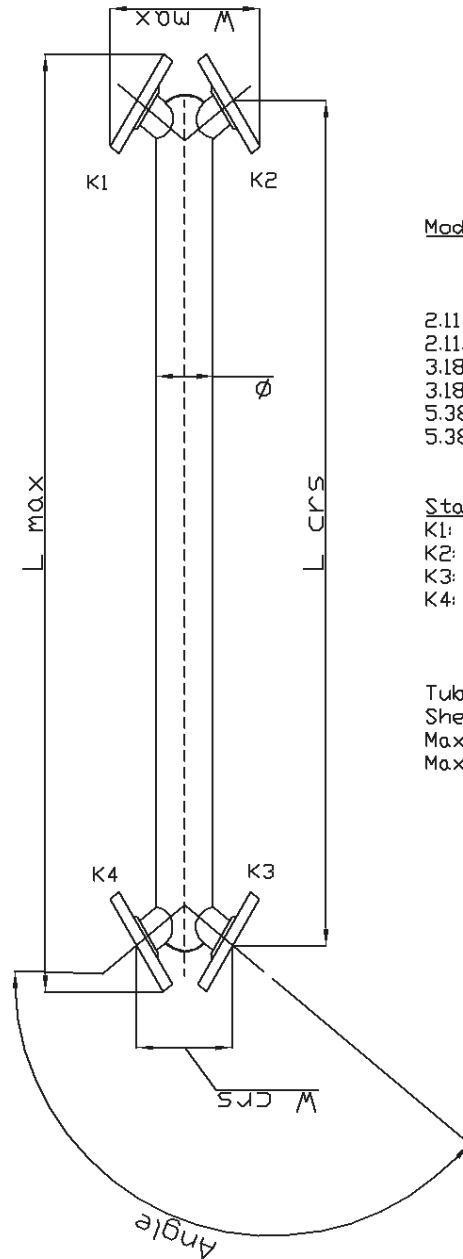

Model	Lmax (mm)	Wmax (mm)	Lcrs (mm)	Wcrs (mm)	Ø (mm)	Angle (Deg)	Heat Area (m ²)	Weight (Kg)	Connections
2.11	1625	253	1513	160	80	100	1.2	19.0	DN40/PN16
2.11.08.68	942	253	835	160	80	100	0.6	13.0	DN40/PN16
3.18	1634	278	1510	172	102	100	2.0	25.0	DN50/PN16
3.18.08.75	1041	278	917	172	102	100	1.2	21.4	DN50/PN16
5.38	1649	317	1510	204	140	100	4.6	41.7	DN65/PN16
5.38.08.71	1047	317	908	204	140	100	2.3	29.2	DN65/PN16

Standard Connection Locations:

- K1: Tube side (hot circuit) inlet (when looking through connection the tube ends can be seen)
- K2: Shell side (cold circuit) outlet (when looking through connection the tube sides can be seen)
- K3: Shell side (cold circuit) inlet
- K4: Tube side (hot circuit) Outlet.

Tube material: 316 Stainless
 Shell material: 316 Stainless
 Maximum working pressure: 16 bar g.
 Maximum working temperature: 203 Deg C.