

## Wort Coolers

Gasketed Plate Heat Exchangers specifically designed to cool wort efficiently using mains water and/or chilled water.

We have standard units for cooling 1, 2.5, 5, 7.5, 10, 15, 20, 25 & 30 barrels/hour of wort from 98°C to 20°C using mains water at 15°C heated to 70+°C. alternative designs can be provided on request.


A 20% additional heat transfer area is included to ensure that the desired cooling is achieved even when the plates are partially fouled.

### Standard Features

- ◆ UK manufacture with fast delivery times
- ◆ Single section—For mains water
- ◆ Two section—For mains water & chilled water
- ◆ Plates: 316 Stainless Steel
- ◆ Gaskets: Food Grade Nitrile
- ◆ Connections: BSP threaded
- ◆ Frames: Painted Steel

### Options

- ◆ Stainless Steel Frame
- ◆ Hygienic connections—RJT, IDF, Tri-Clamp
- ◆ Mounting feet
- ◆ Wall Mounting Bracket
- ◆ Insulation Jacket

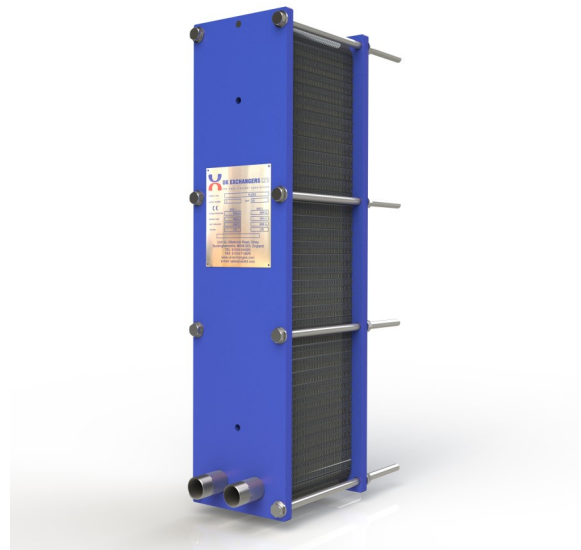

Single section heat exchanger with painted steel frame & BSP male connections




Two section heat exchanger with a stainless steel frame & wall mounting bracket

**UK EXCHANGERS LTD** UKE 2A-3  
the heat transfer specialists Gasket Plate  
Heat Exchanger


Telephone: +44 (0) 1234 244320 Email: sales@ukeltd.com  
Unit 55, Stilebrook Road, Olney, Buckinghamshire, MK46 5EA, United Kingdom

#### Indicative Representation


Front




Back




#### Overall Dimensions



#### Wall Bracket Option



#### Connection Options



Other connection types Available on request

**UK Exchangers Ltd**

Unit 55, Stilebrook Road, Olney, Buckinghamshire MK46 5EA

Tel: 01234-244320 E-mail: sales@ukeltd.com